


Acessórios de Junta Mecânica FFD

Curva 22° 30'

DOUBLE SOCKET BEND 22° 30'

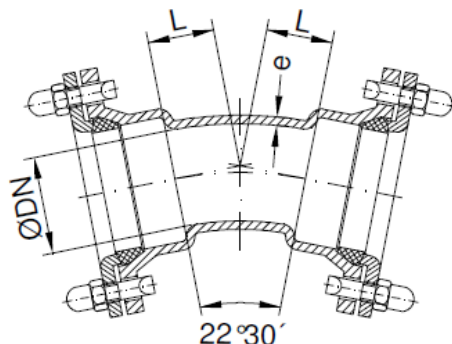

DN	DIMENSÕES MM		PESO (KG)
	L	e	
60	35	7	6.3
80	40	7	9
100	40	7.2	11.7
125	50	7.5	13.9
150	55	7.8	17
200	65	8.4	24.5
250	75	9	34.4
300	85	9.6	45.1
350	95	10.2	63.8
400	110	10.8	75.5
450	120	11.4	98
500	130	12	121.6
600	150	13.2	172.1
700	175	14.4	251.1
800	195	15.6	322.9
900	220	16.8	417
1000	240	18	550

Características:

- Pressão de trabalho PN 10 - PN16 – PN25
- Pintura epoxy > 250microns.
- Adequada para águas de consumo humano.
- DN 60-1000.
- Fundição Dúctil GJS-500-7 de acordo com a EN1563.

Design Features:

- PN 10-16-25 operating pressure.
- Coating paint epoxy 250 microns as a minimum.
- Suitable for water human consumption.
- DN 60-1000.
- Ductil Iron GJS-500-7 according to EN1563.

Ensaio:

- De acordo com EN545.

Test:

- According to EN545.