


Acessórios de Junta Mecânica FFD

Curva 11° 15'

DOUBLE SOCKET BEND 11° 15'

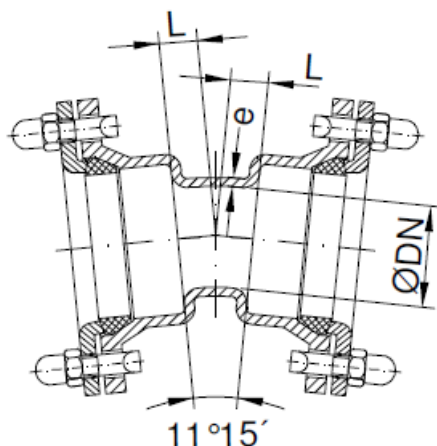

DN	DIMENSÕES MM		PESO (KG)
	L	e	
60	25	7	6.1
80	30	7	8.7
100	30	7.2	11.3
125	35	7.5	13.2
150	35	7.8	15.9
200	40	8.4	22.5
250	50	9	31.7
300	55	9.6	41
350	60	10.2	57.9
400	65	10.8	66.3
450	70	11.4	85.5
500	75	12	106.1
600	85	13.2	146.1
700	95	14.4	210.5
800	110	15.6	266
900	120	16.8	359
1000	130	18	473

Características:

- Pressão de trabalho PN 10 - PN16 – PN25
- Pintura epoxy > 250microns.
- Adequada para águas de consumo humano.
- DN 60-1000.
- Fundição Dúctil GJS-500-7 de acordo com a EN1563.

Design Features:

- PN 10-16-25 operating pressure.
- Coating paint epoxy 250 microns as a minimum.
- Suitable for water human consumption.
- DN 60-1000.
- Ductil Iron GJS-500-7 according to EN1563.

Ensaio:

- De acordo com EN545.

Test:

- According to EN545.