


Braçadeira de Reparação 3S

3 PIECES SADDLE

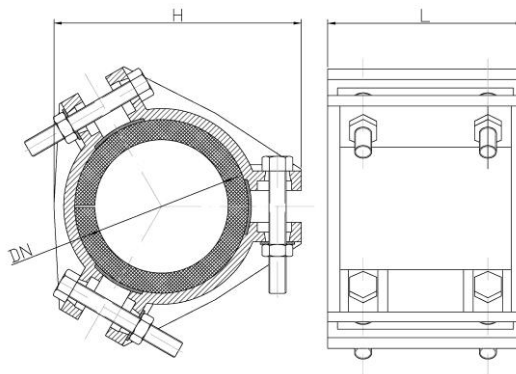

DN	Tolerância	H	L	Peso
80	84-109	205	160	9.1
100	103-125	220	160	10.1
125	128-150	248	160	12.9
150	159-184	275	210	15.8
200	211-238	330	270	24.9
250	251-283	370	360	36.1
300	310-340	425	430	47.5

Características:

- Pressão de trabalho
PN 10/16.
- Pintura epoxy >250 microns.
- Adequada para águas de consumo humano.
- DN 80 – 300

Design Features:

- PN 10-16 operating pressure.
- Coating paint epoxy 250 microns as a minimum.
- Suitable for water human consumption.
- DN 80-300.

Materials

Corpo: Fundição Dúctil GJS-500-7 de acordo com a EN 1563.

Vedantes: Elastômero EPDM de acordo com a EN 681-1.

Parafusos e porcas : Aço Zincado 6.8

Materials

Body: Ductile Iron GJS-500-7 according to EN 1563.

Rubber: Elastomer EPDM according to EN 681-1.

Screws and nuts: 6.8 Zinc Plated Steel.

Ensaio:

- Dimensional e Hidráulico.

Test:

- Hydraulic and dimensional.



