
Flange Universal Multi-Fix

COUPLING FLANGE SELF-LOCKING



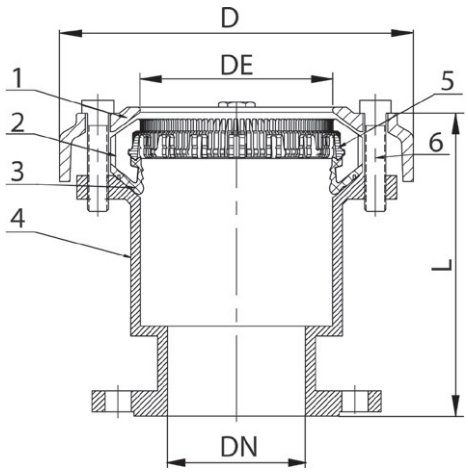

DN	FLANGE	DE	D	L	Peso (Kg)
DN50	50/60	46-70	187	170	5,50
DN65	50/60/65	70-95	212	195	7,00
DN80	65/80	88-123	240	215	10,00
DN100	100	108-143	260	225	12,00
DN125	125	133-168	285	225	12,50
DN150	150	159-194	311	225	15,00
DN200	200	200-235	370	245	21,00
DN250	250	250-285	420	265	28,00
DN300	300	315-350	485	275	38,00

Características:

- *Para união de tubos de PE, PVC, fundição, aço, fibrocimento.*
- *Furação de flange e pressão de trabalho PN 10/16.*
- *Revestimento epóxico, aplicação interna e externa eletrostaticamente de acordo com EN 14901 com uma espessura mínima de revestimento de 250 µm*
- *Deflexão angular de ± 4°*
- *Adequada para águas de consumo humano.*
- *DN 50-600*

Characteristics:

- *Suitable for joint pipes PE, PVC, cast iron, steel, asbestos-cement.*
- *Flange and operating pressure PN10/16.*
- *Inside and outside with coating paint epoxy 250 microns as a minimum*
- *Angular deflection ± 4°*
- *Suitable for water human consumption.*
- *DN 50-600.*

Materiais

Aro (1) e Corpo (4): Fundição Dúctil EN-GJS-450-12 de acordo com a EN 1563.

Suporte das Garras (2): Plástico PA6.

Vedante (3): EPDM de acordo com a EN 681-1.

Garras (5): Aço carbono galvanizado.

Parafuso, porca e anilhas (6): Aço carbono 8.8 galvanizado.

Materials

Body (1) (4): Ductile Iron EN-GJS-450-12 according to EN1563.

Claw Support (2): Plastic PA6.

Rubber (3): EPDM according to EN 681-1.

Claws (5): Galvanized Carbon Steel.

Screws, nuts, washers (6): Galvanized Carbon steel 8.8

Ensaios:

- *Dimensional e hidráulico.*

Test:

- *Hydraulic and dimensional.*

CASVIAN
Produção e Comércio de Acessórios para Fluídos

Os materiais, especificações técnicas e desenhos são susceptiveis de alterações sem aviso prévio devido ao desenvolvimento continuo dos nossos produtos.